

Math 2250-1
Friday Oct 31

HW for Friday Nov. 7

- Maple project

6.5 (49) 50 (52)

5.6 (3, 5, 7, 14, 16, 21, 22)

EP 3.7 (supplemental section)

(2, 3, 4, 7, 11, 20)

- Variation of parameters method
of finding x_p , page 4 Wed notes) maybe went on this

then begin § 5.6: forced oscillations and resonance

Overview

$$m x'' + c x' + kx = F_0 \cos \omega t$$

- undamped ($c=0$)

$$m x'' + kx = F_0 \cos \omega t$$

$$\begin{aligned} \bullet \omega \neq \omega_0 &= \sqrt{\frac{k}{m}} & x_p &= A \cos \omega t + B \sin \omega t & \text{general soltn} \\ & & &= C \cos(\omega t - \alpha) & \\ & & & & x = x_p + x_A \\ & & & & = C \cos(\omega t - \alpha) \\ & & & & + C_0 \cos(\omega_0 t - \alpha_0) \end{aligned}$$

$$\begin{aligned} \bullet \omega = \omega_0 & & x_p &= t(A \cos \omega_0 t + B \sin \omega_0 t) \\ & & &= t C \cos(\omega_0 t - \alpha) & \text{general soltn} \quad x = x_p + x_H \end{aligned}$$

RESONANCE!

- $\omega \neq \omega_0$, but ω close to ω_0

BEATING

- damped ($c > 0$) (More details Monday)

$$\begin{aligned} x_p &= A \cos \omega t + B \sin \omega t \\ &= C \cos(\omega t - \alpha) \end{aligned}$$

$x_H \rightarrow 3$ possibilities (over, critically, underdamped)

key feature they all share is $x_H(t) \rightarrow 0$ exponentially fast as $t \rightarrow \infty$.

so x_p is called x_{sp} (steady periodic)

x_H is called x_{tr} (transient)

when damping c is small, and ω is near ω_0 , then amplitude C of x_{sp} will (often)
be a large multiple of forcing amplitude F_0 . This is called
approximate resonance

Example 1 p 350 : $m=1, k=9, F_0=80, \omega=5, \omega_0=?$

$$\begin{cases} x''(t) + 9x(t) = 80 \cos \omega t \\ x(0) = 0 \\ x'(0) = 0 \end{cases}$$

x_H :

x_p :

ans

$$x(t) = 5 \cos 3t - 5 \cos 5t$$

$$\begin{array}{ccc} \uparrow & & \uparrow \\ \text{period} & & \text{period} \\ T_0 = \frac{2\pi}{3} & & T_1 = \frac{2\pi}{5} \end{array}$$

(and all integer multiples).

the period of the sum will be the least common integer multiple of T_0 and T_1 , which in this case is


1b)



Example 1 page 350

```
> with(plots):
> plot(5*cos(3*t)-5*cos(5*t), t=0..6*Pi, color=black,
      title='Figure 5.6.2 page 350, period=?');
```

Figure 5.6.2 page 350, period=?

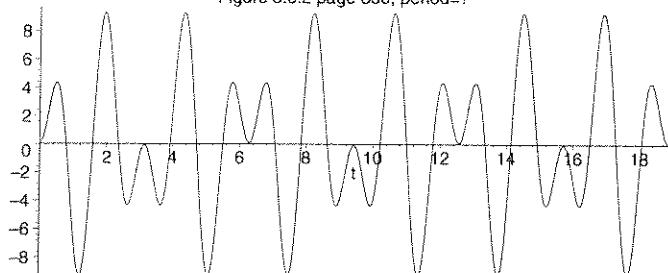

1c) for $x'' + \omega_0^2 x = \frac{F_0}{m} \cos \omega t$

$$x(t) = x_p + x_H.$$

When will the sum be periodic, when won't it be?

undamped forced IVP, $\omega \neq 0$, with letters

$$\begin{cases} x'' + \frac{k}{m}x = \frac{F_0}{m} \cos \omega t \\ x(0) = x_0 \\ x'(0) = v_0 \end{cases}$$

$$+ \frac{k}{m} (x_p = A \cos \omega t)$$

$$+ 0 (x'_p = -A \omega \sin \omega t)$$

$$+ 1 (x''_p = -A \omega^2 \cos \omega t)$$

$$L(x_p) = \cos \omega t A \left[\frac{k}{m} - \omega^2 \right]$$

\uparrow
 ω_0^2

$$\text{deduce } A(\omega_0^2 - \omega^2) = \frac{F_0}{m}$$

$$A = \frac{F_0}{m} (\omega_0^2 - \omega^2)$$

$$\text{so, } x_p(t) = -\frac{F_0}{m(\omega^2 - \omega_0^2)} \cos \omega t. \text{ Note } x_H(t) = A \cos \omega_0 t + B \sin \omega_0 t.$$

so, by plugging in or observation

IVP solution is

$$x(t) = \frac{+F_0}{m(\omega^2 - \omega_0^2)} (\cos \omega_0 t - \cos \omega t) + x_0 \cos \omega_0 t + \frac{v_0}{\omega_0} \sin \omega_0 t$$

check NR!

when ω is near (but $\neq 0$) ω_0 ,
this sum varies between ± 2 ,
depending on whether the two
terms are in, or out of phase....

trig makes this precise!!

$$\cos(\alpha - \beta) - \cos(\alpha + \beta) \quad //$$

$$\cancel{\cos \alpha \cos \beta + \sin \alpha \sin \beta} - (\cos \alpha \cos \beta - \sin \alpha \sin \beta) \\ = 2 \sin \alpha \sin \beta$$

$$\left. \begin{aligned} \text{let } \alpha = \bar{\omega}t &= \left(\frac{\omega + \omega_0}{2} \right)t \\ \beta = \delta t &= \left(\frac{\omega - \omega_0}{2} \right)t \end{aligned} \right\} \text{ so } \begin{aligned} \alpha - \beta &= \omega_0 t \\ \alpha + \beta &= \omega t \end{aligned}$$

i.e.

$$x(t) = \frac{F_0}{m(\omega^2 - \omega_0^2)} \cdot 2 \sin \bar{\omega}t \sin \delta t + x_0 \cos \omega_0 t + \frac{v_0}{\omega_0} \sin \omega_0 t$$

$$\text{period } \frac{2\pi}{\bar{\omega}}$$

$$\bar{\omega} = \frac{\omega + \omega_0}{2}$$

$$\text{period } \frac{2\pi}{\delta}$$

$$\delta = \frac{\omega - \omega_0}{2}$$

Beating

Notice the beating
amplitude $\frac{2F_0}{m(\omega^2 - \omega_0^2)}$
blows up as $\omega \rightarrow \omega_0$

(4)

Example 2 (not the text's).

Keep the same data as in #1 : $m=1, k=9, F_0=80$
 $\omega_0=3$

except choose $\omega = 3.1$


Use second box to solve IVP

$$\begin{cases} x'' + 9x = 80 \cos(3.1t) \\ x(0) = 0 \\ v(0) = 0 \end{cases}$$

and compute the beating period and amplitude

ans $x(t) \approx 262.3 \sin(3.05t) \sin(.05t)$

$T_{\text{beat}} \approx 126$

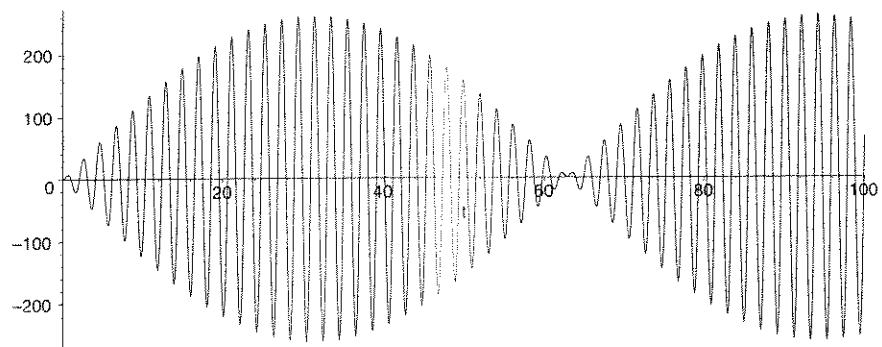

(5)

Resonance! $\omega = \omega_0$

$$\begin{cases} x'' + \omega_0^2 x = \frac{F_0}{m} \cos \omega_0 t \\ x(0) = x_0 \\ x'(0) = v_0 \end{cases}$$

using 6.5.5, guess

$$\begin{aligned} &+ \omega_0^2 (x_p = t(A \cos \omega_0 t + B \sin \omega_0 t)) \\ &0 (x_p' = t(-A\omega_0 \sin \omega_0 t + B\omega_0 \cos \omega_0 t) + A \cos \omega_0 t + B \sin \omega_0 t) \\ &+ 1 (x_p'' = t(-A\omega_0^2 \cos \omega_0 t - B\omega_0^2 \sin \omega_0 t) + [-A\omega_0 \sin \omega_0 t + B\omega_0 \cos \omega_0 t] 2) \end{aligned}$$

$$L(x_p) = t(0) + 2[-A\omega_0 \sin \omega_0 t + B\omega_0 \cos \omega_0 t] \stackrel{\text{want}}{=} \frac{F_0}{m} \cos \omega_0 t$$

Deduce $A=0$
 $B = \frac{F_0}{2m\omega_0}$

$$x_p(t) = \frac{F_0}{2m\omega_0} t \sin \omega_0 t$$

$\underbrace{\hspace{1cm}}$

sats $x(0)=0$, so IVP soltn is
 $x'(0)=0$

$$x(t) = \frac{F_0}{2m\omega_0} t \sin \omega_0 t + x_0 \cos \omega_0 t + \frac{x_0}{\omega_0} \sin \omega_0 t$$

(you can also guess this by letting $\omega \rightarrow \omega_0$ on page 3, second box, via linearization!)

No matter how small $F_0 \neq 0$,
 soltn blows up as $t \rightarrow \infty$!

Example 3, as before $m=1, k=9 (\omega=3)$

$$F_0 = 80$$

$$\omega = 3$$

$$\begin{cases} x'' + 9x = 80 \cos 3t \\ x(0) = 0 \\ x'(0) = 0 \end{cases}$$

$$x(t) = ?$$

$$\text{ans } x(t) = \frac{40}{3} t \sin 3t$$

